


M485-DI8AC-I

8 digital inputs to DC and AC. RS485 bus. 10 - 30VDC

FEATURES

- RS485 Module - Slave, with digital input
- 8 x digital inputs for DC and AC
- Voltage monitoring
- input voltage: 80 - 250VAC / DC
- Supply: 10 -30vdc

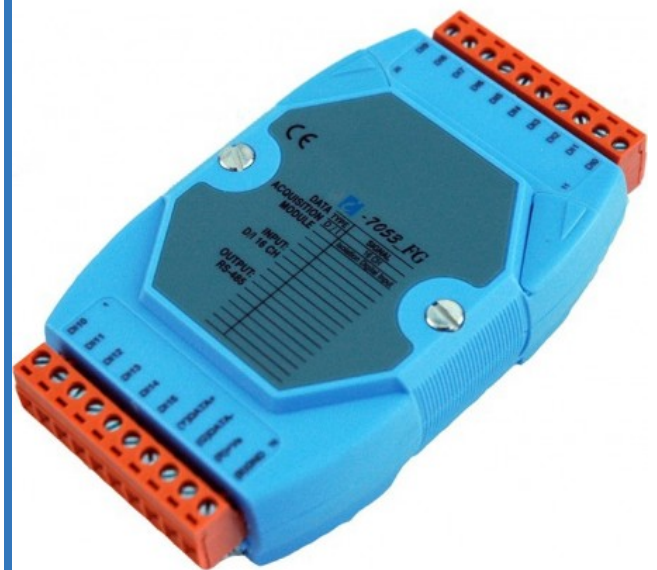

M485-DI8AC-I

SPECIFICATIONS

| | | |
|-----------|---|--|
| Forsyning | : | 10 - 30 VDC, 0,8 W via klemrække |
| Indgang | : | 8 individuelt isolerede kanaler. Logisk 0: 0 - 30 V Logisk 1: 80 - 250 V |
| Isolation | : | 3750 VRMS |
| Tæller | : | 1 stk. 16 bit tæller maks. frekvens 100 Hz Logisk 0: 0 - 30 V Logisk 1: 80 - 250 V |



DANBIT A/S - Dansk Binær Teknik
Værkstedsvvej 39 Køge , 4600 Danmark



+45 56 66 20
20



salg@danbit.dk