


Embedded Industrial mini PC 3½", Atom N2600,
CF, 4 x USB, 2 x RS232 CAN bus for older OS
Windows 7, XP Embedded and Linux

FEATURES

- Not recommended for newer OS! No Windows 10/11 support
- Contact us regarding replacement
- The chipset is EOL
- Atom 1.6 GHz CPU N2600
- 2 GB RAM DDR3, So-DIMM socket
- 1 x RS232/422/485 with DB9 connector
- 1 x RS232/422/485/CAN with DB9 connector
- VGA
- 4 x USB 2.0
- 2-in/2-out digital
- 2 x 10/100/1000 RJ45 ethernet
- Mini SIM slot
- 2.5" SSD/HDD slot (hard drive NOT included)
- DIN rail mounting
- 9~32 VDC
- Dimensions: 145 x 102 x 50 mm
- Temperature: 0 - +50°C
- OS support: Windows 7, XP Embedded and Linux

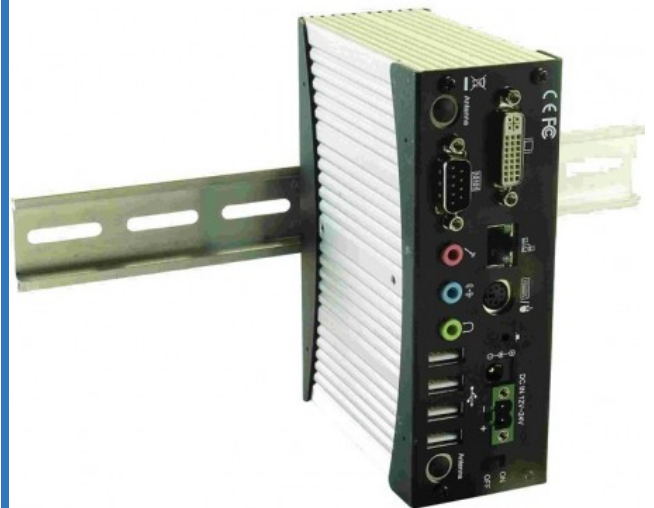

SPECIFICATIONS

CPU	:	Intel Atom-N2600 1.6GHz, 1MB L2 cache (Intel dual core CPU)
Chipset	:	NM10
Hukommelse	:	1 x 200-pin DDR3-RAM SO-DIMM. Monteret med 2GB RAM (maks. 2GB)
I/O	:	1 x Digital I/O tilslutning via 6 pin terminalblok. Tænd/sluk knap, 1 x Power LED, 1 x HDD LED 1 x PCIe Mini-card interface til trådløs eller GPRS modul
Lyd	:	1 x lydudtag via jack-stik til hovedtelefon
Montering	:	Mulighed for DIN skinne montage. Eller VESA 75*75 panel montering
Netværk	:	2 x 10/100/1000 Mbit m/RJ45-stik Realtek RTL8111F
OS SUPPORT	:	Understøtter Windows 7, XP Embedded og Linux
Porte	:	1 x RS232/422/485 med DB9-stik. 1 x RS232/422/485/CAN med DB9-stik
SSD	:	2½" SATA harddisk
Strømforsyning	:	9~32 VDC, 35V A via 2 pin skrueterminal (benyt DC12V/5A-R-Q)
VGA	:	1 x VGA analog med DB15 tilslutning

